



MEET AQUA ILLI.

The world's smartest touch tap.

Innovative design, cutting-edge technology, and premium aesthetics.

The highest performing tap on the market today.

2468
MAKING BREAKS
MATTER

FEATURES.

- ⬮ Patented boiler design gives high volumes of boiling water
- ⬮ Perfect water flow with zero splash
- ⬮ Removable dispense nozzle for improved hygiene
- ⬮ Designed to fill water bottles without the need for font extension
- ⬮ Plumbed-to-waste flush-fitting drip tray
- ⬮ Safe dispense with a touch padlock feature
- ⬮ Installed in modular form to fit into the tightest of spaces
- ⬮ Pre-set fill volumes for any vessel and free flow options available
- ⬮ Equality Act compliant controls available
- ⬮ Touch or touchless modules available

AVAILABLE FINISHES



CAPACITY



BOILING

PER HOUR

High

up to **45** litres or **180** cups

Ultra high

up to **90** litres or **180** flask/tea pots



CHILLED / SPARKLING / AMBIENT

PER HOUR

up to **45** litres or **180** glasses


60+ litres or **240+** glasses

*Based on the following measurements: 1 cup/glass = 250ml & 1 flask/tea pot = 500ml


DIMENSIONS.

Undercounter units and dispensers.


B - boiling, C - chilled, S - sparkling, A - ambient

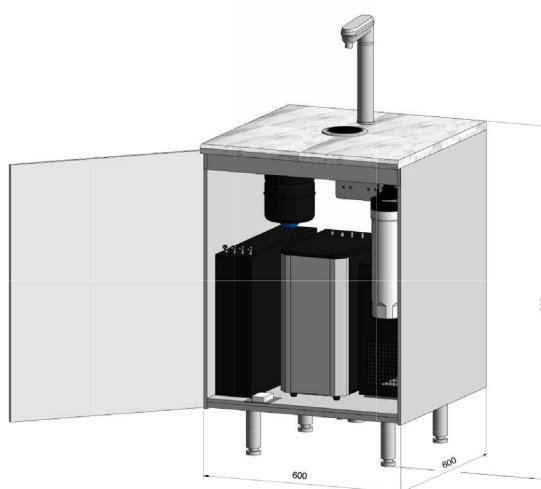


AQUA ILLI BCA

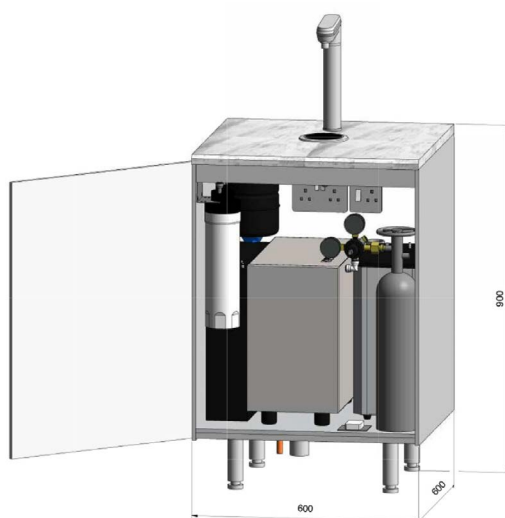

AQUA ILLI BCS

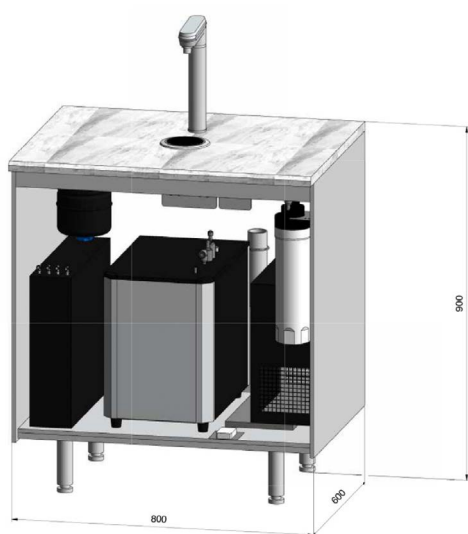

AQUA ILLI BCA ULTRA

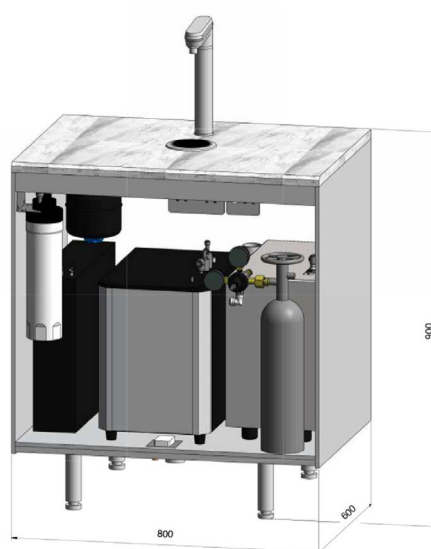

AQUA ILLI BCS ULTRA

Other dispense options are available on request

PRE-INSTALLATION SERVICE REQUIREMENTS.

1

WATER.

No. 1 x Potable cold mains water supply terminating in a 15mm Ballofix isolation valve.

Minimum water pressure required:
2.5 BAR.

Minimum water flow rate required:
300 L.P.H.

Please Note: The site cold mains water supply must be microbiologically safe.

2

POWER.

No. 3 x 220 - 240V ac 50Hz Single switched 13A power sockets.

AQUA ILLI CHILLED STILL & HOT:

Water System Power Load: (Peak Time):
8.0Amps – 1750 Watts.

3

WASTE.

No. 1 x 40mm upstand trapped waste supply.

VENTILATION:

The base cabinet that houses the water cooler requires adequate ventilation, the ambient air temperature inside the base cabinet should not exceed 32°C. No objects should be placed on or around the water cooler.

Base cabinet ventilation options are available on request.

CO2 GAS:

(For Sparkling Systems Only) Food grade CO2 bottle type E290 is to be provided by the operator (2 kg, 6 kg or 10kg). The CO2 bottle must be located as far as possible from any heat sources.

The CO2 gas bottle should be sited in an upright position and secured with a safety strap.